




Axe-Lock String Locking System Quick Guide

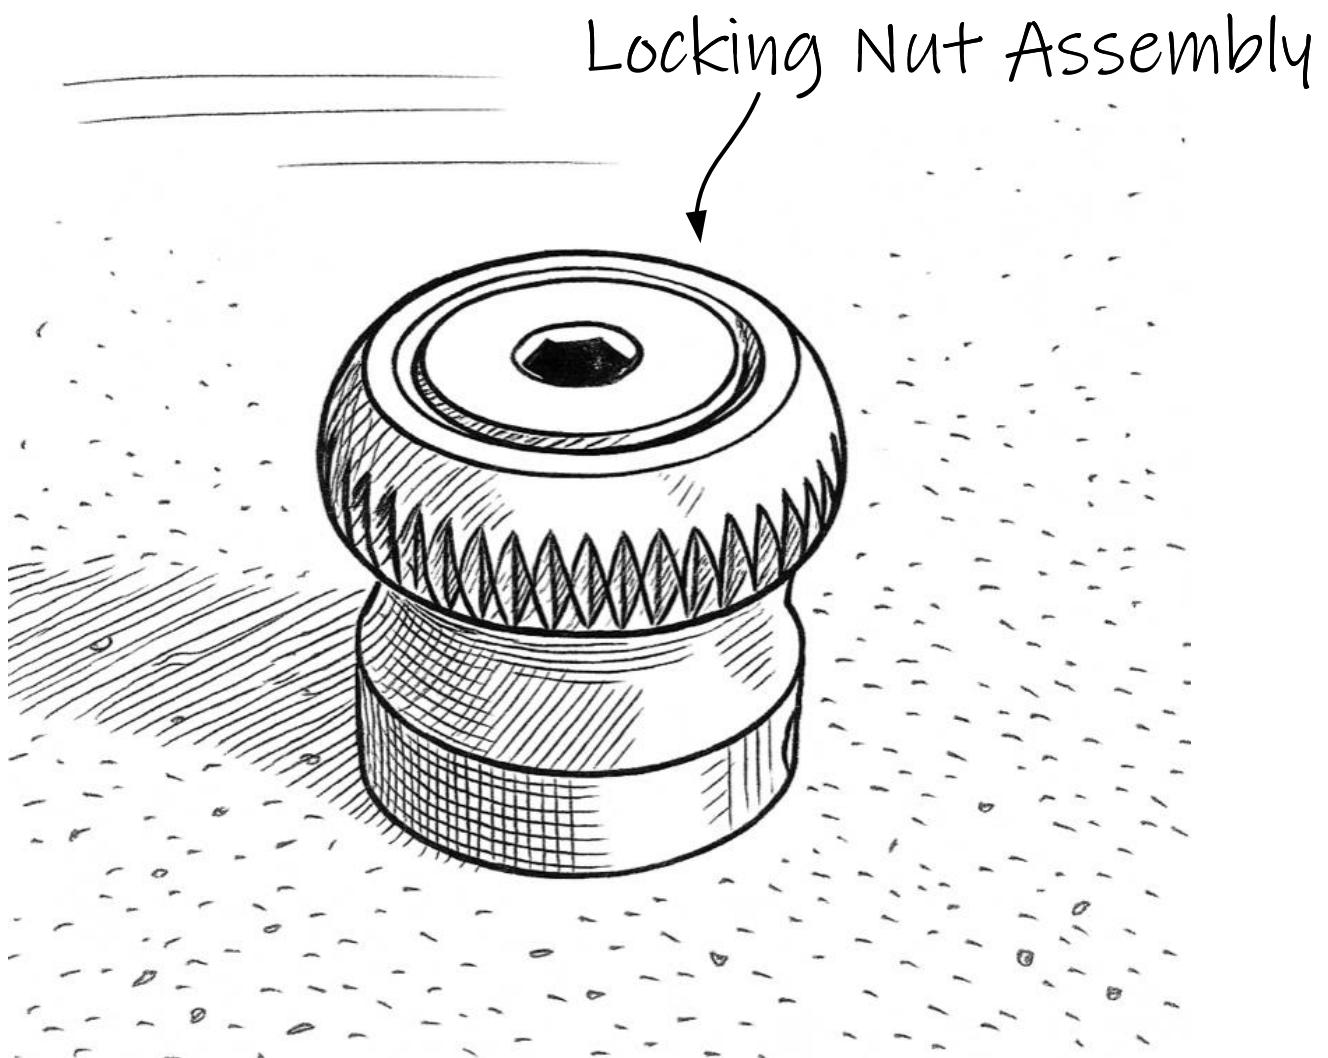


Remove The Top Half

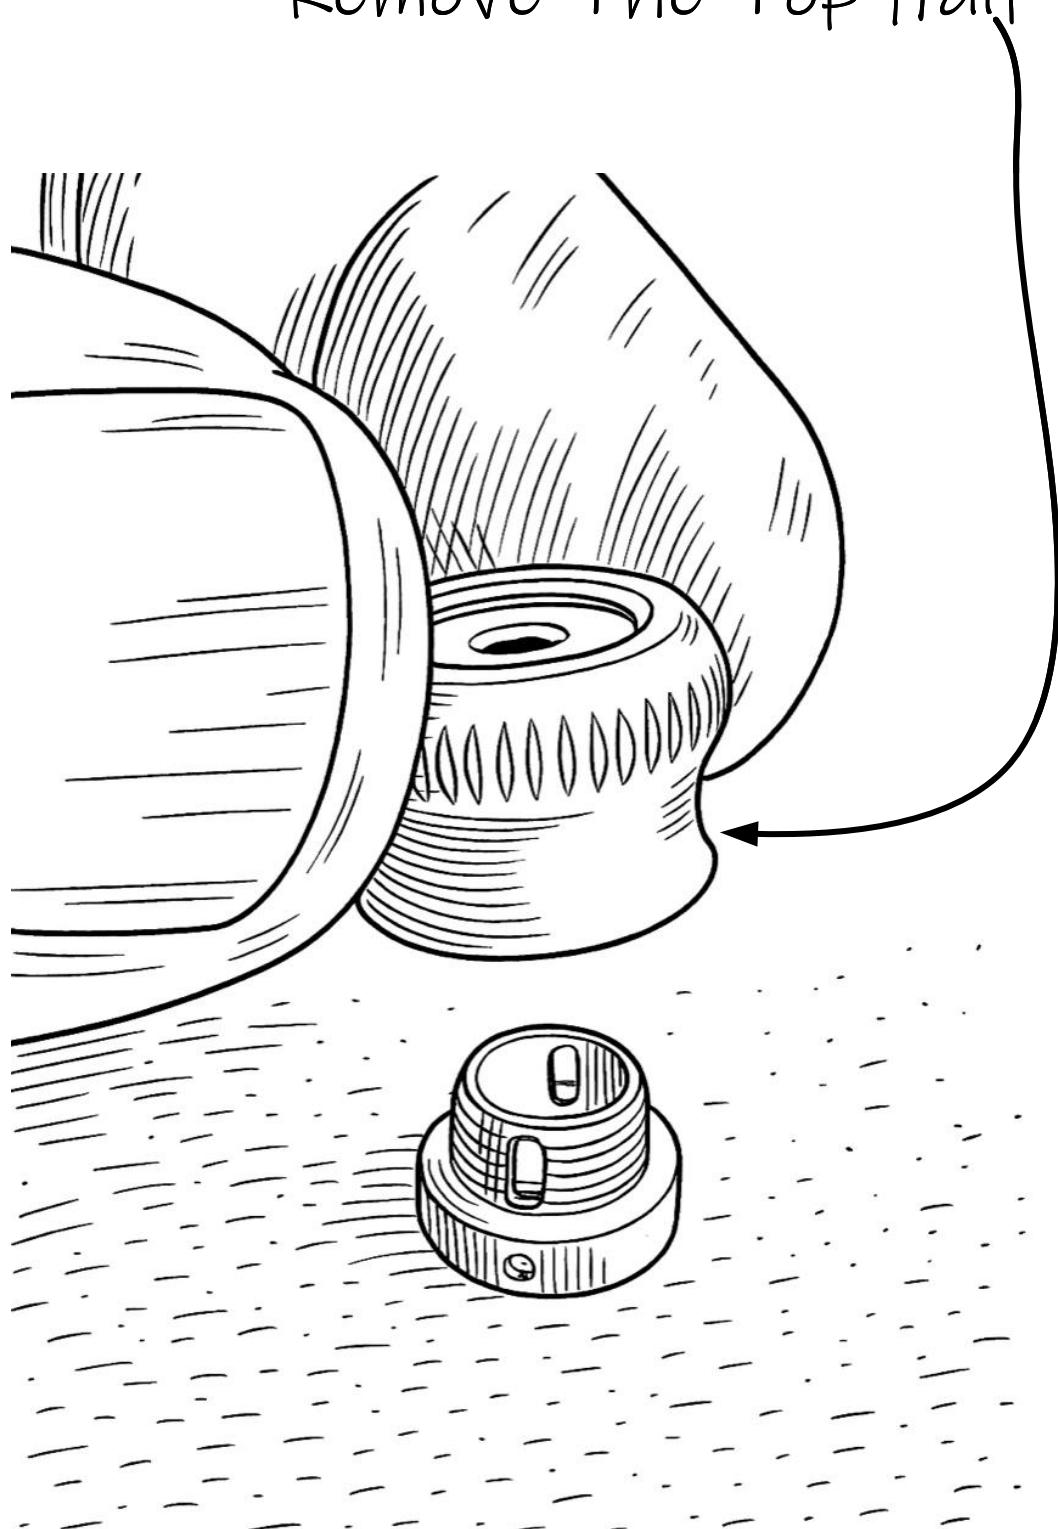


Push & Insert Bottom Half
Into Tuning Peg

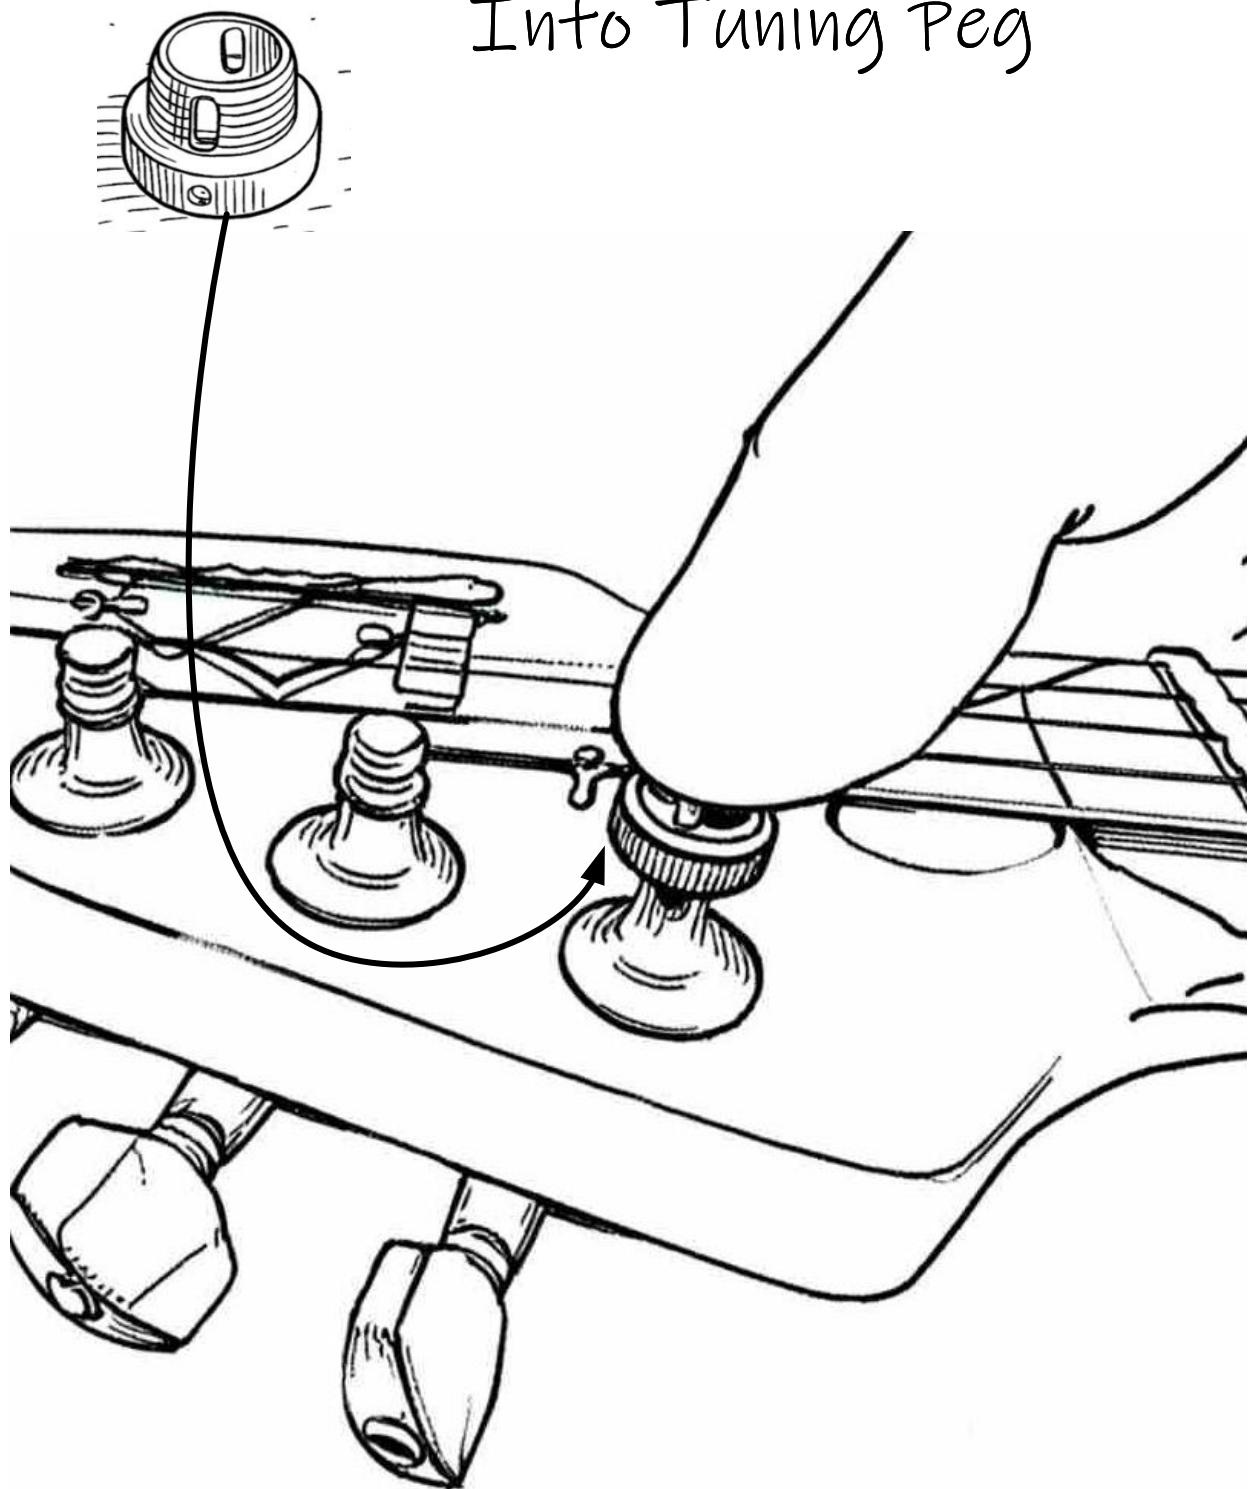


Align The Bottom Half
Hole with The Tuning Peg
String Hole

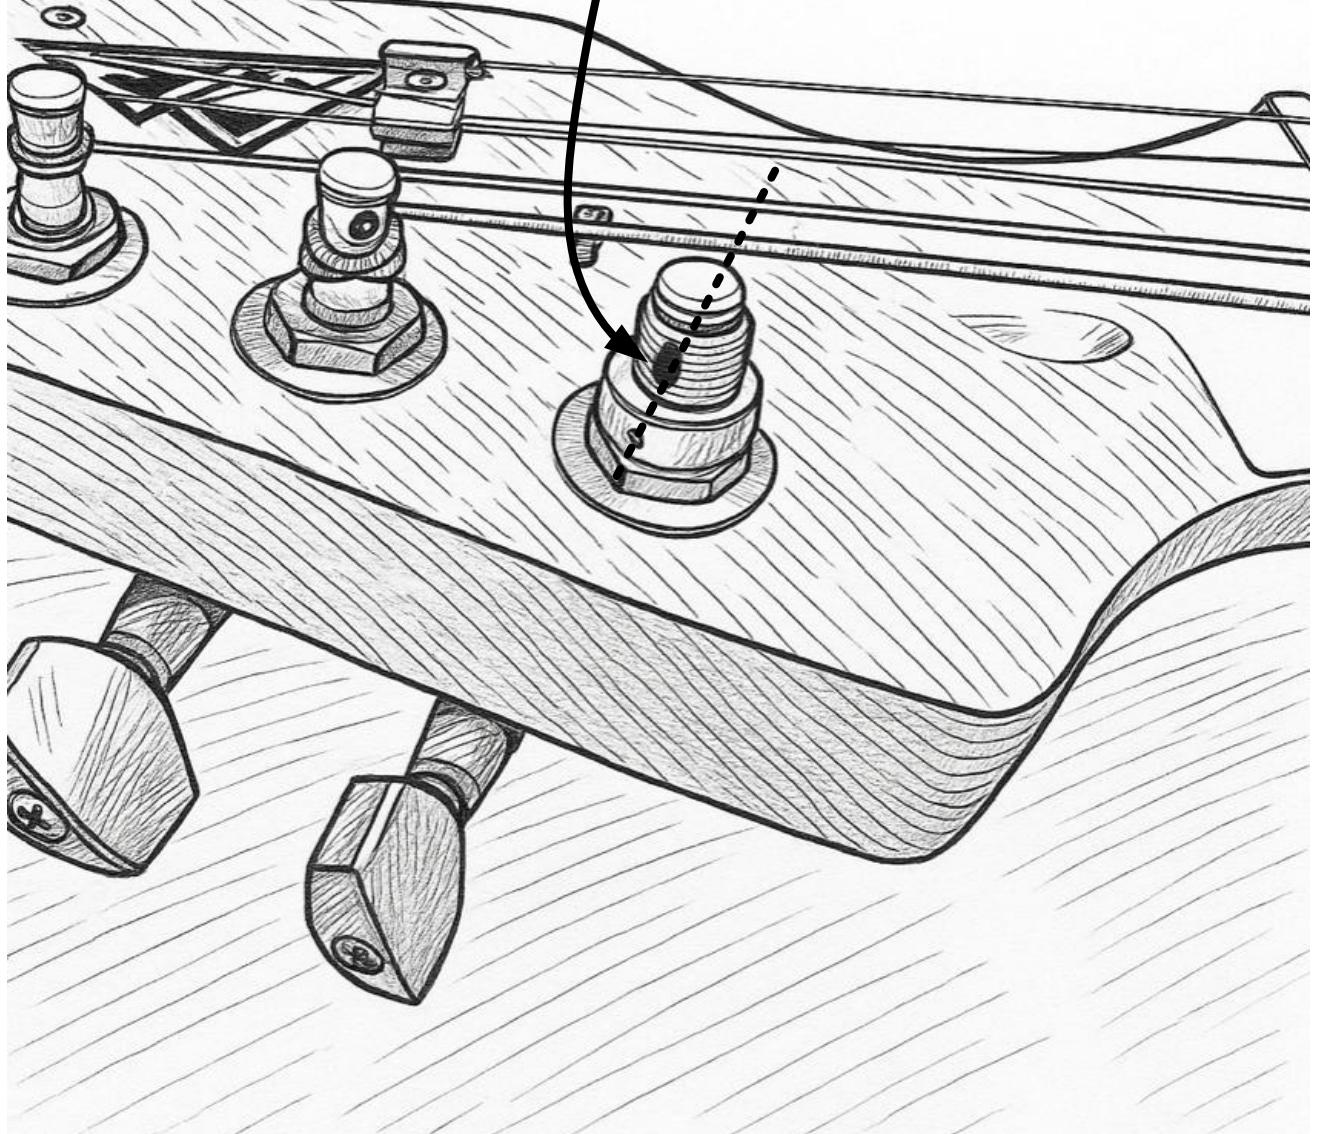


Insert String Into Hole

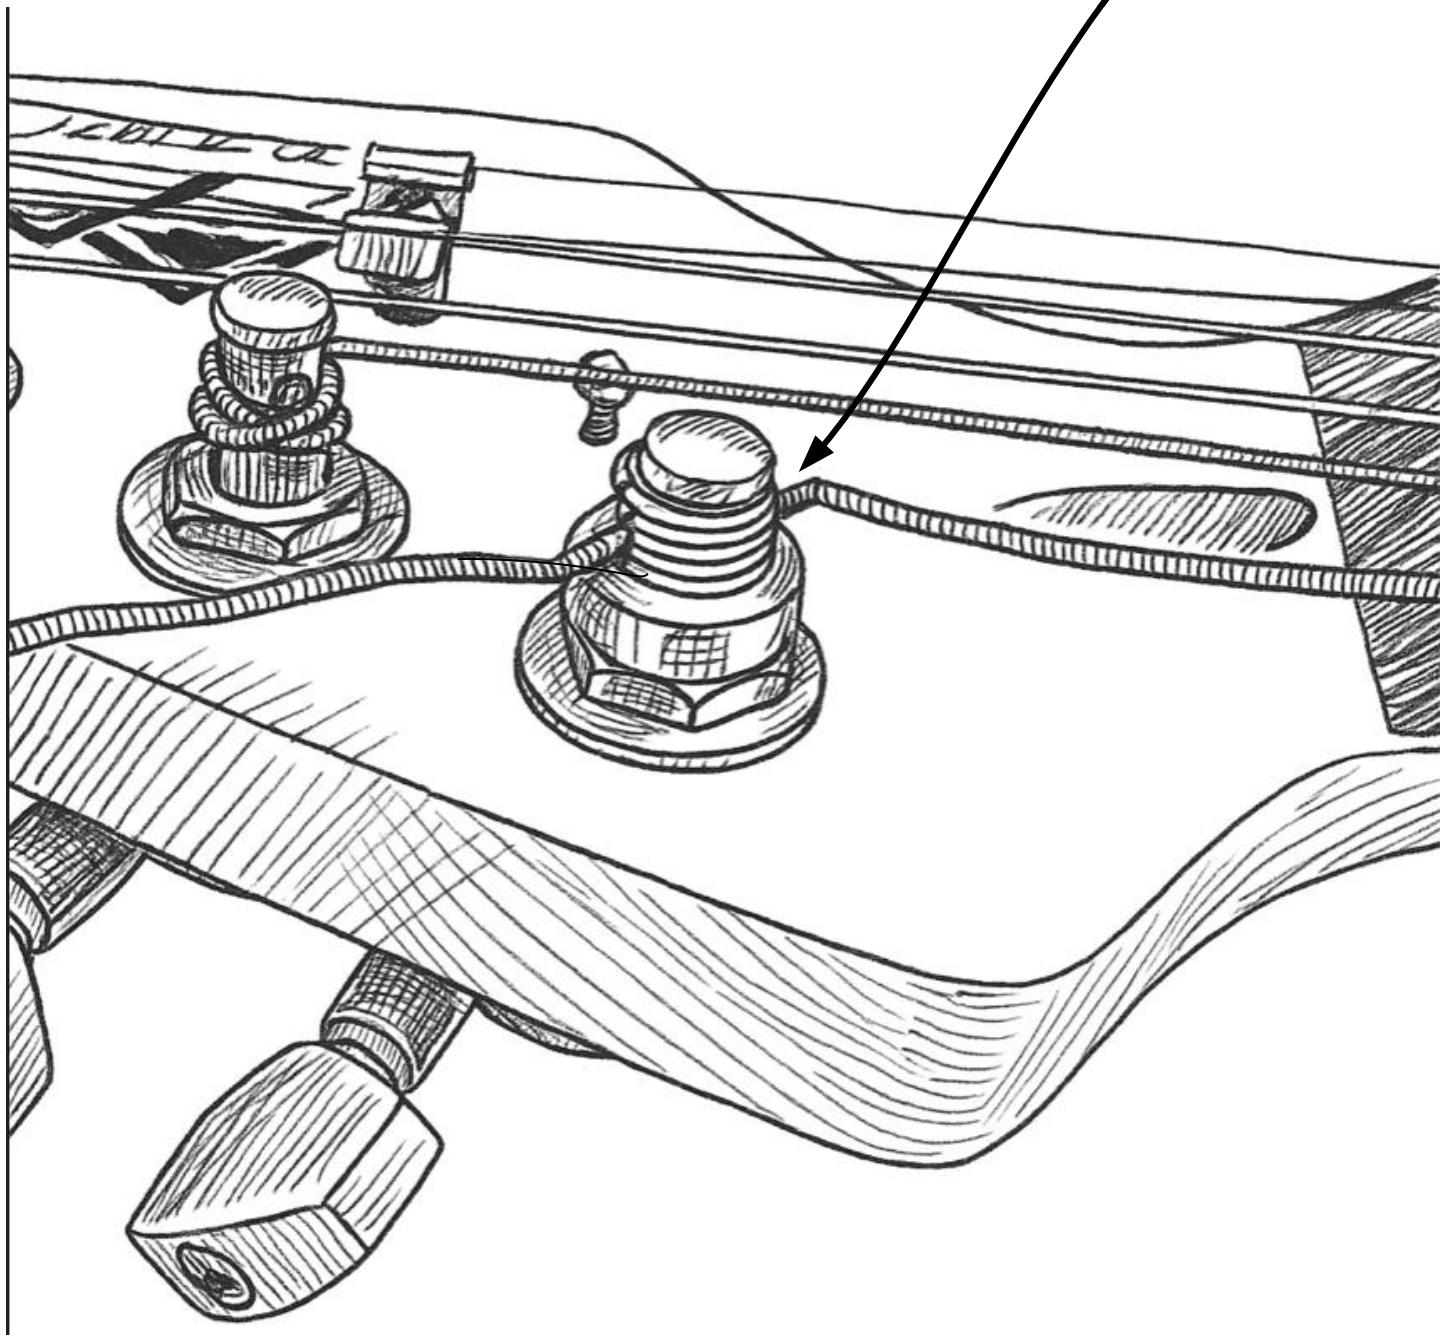

Insert & Screw Top Half
with Thumb & Tighten With
Allen Key Supplied

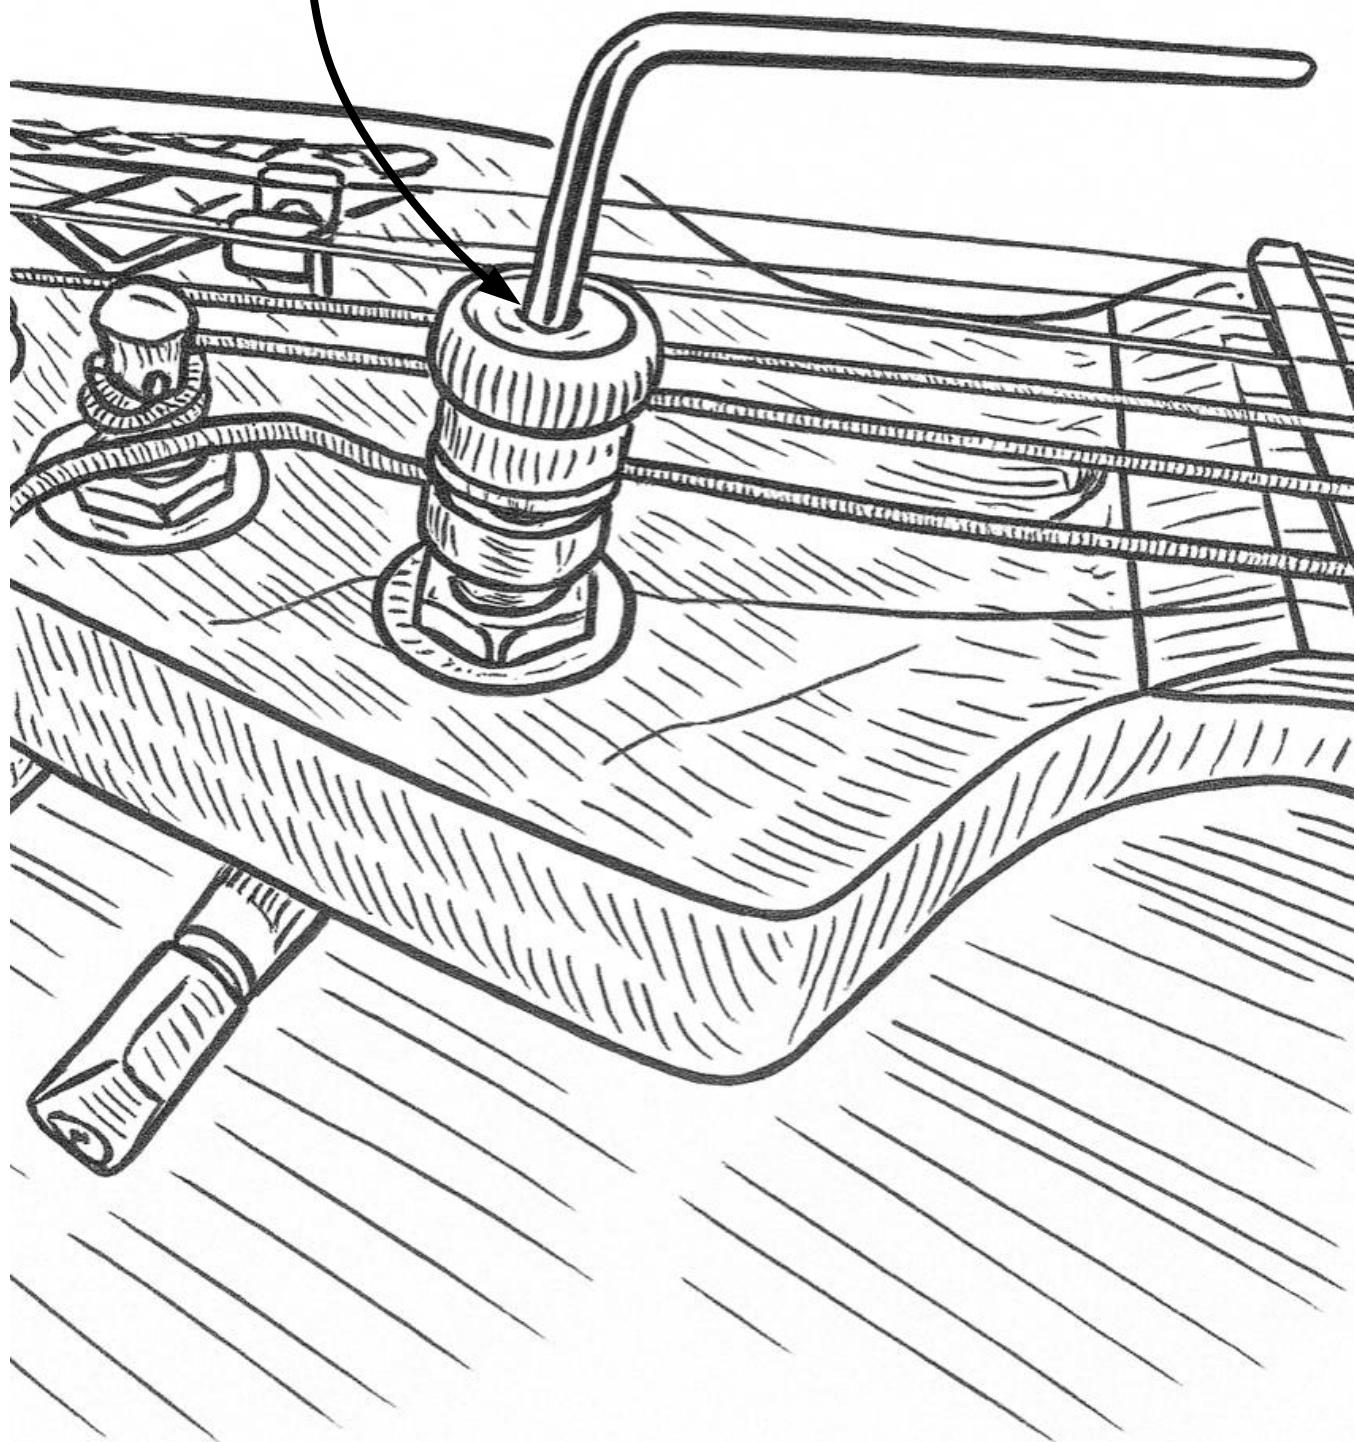

Trim Excess String For Neat
Finnish

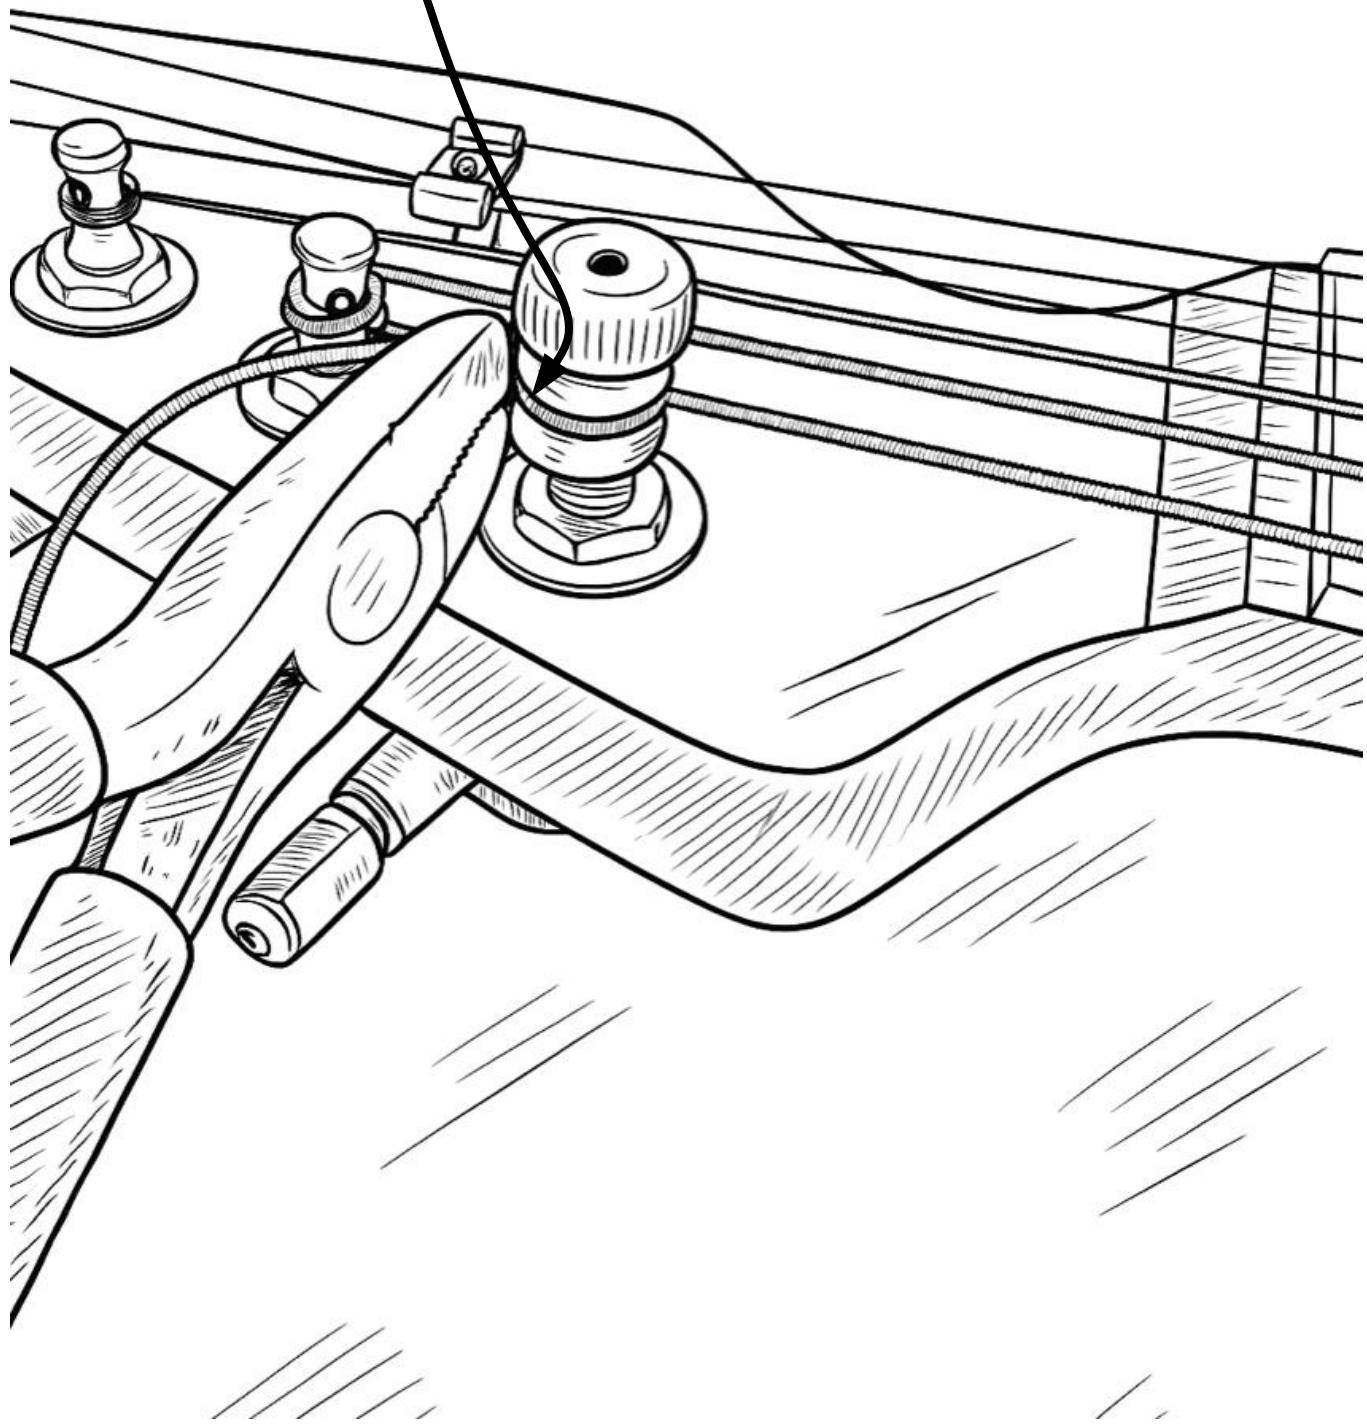

And You're Done!

